


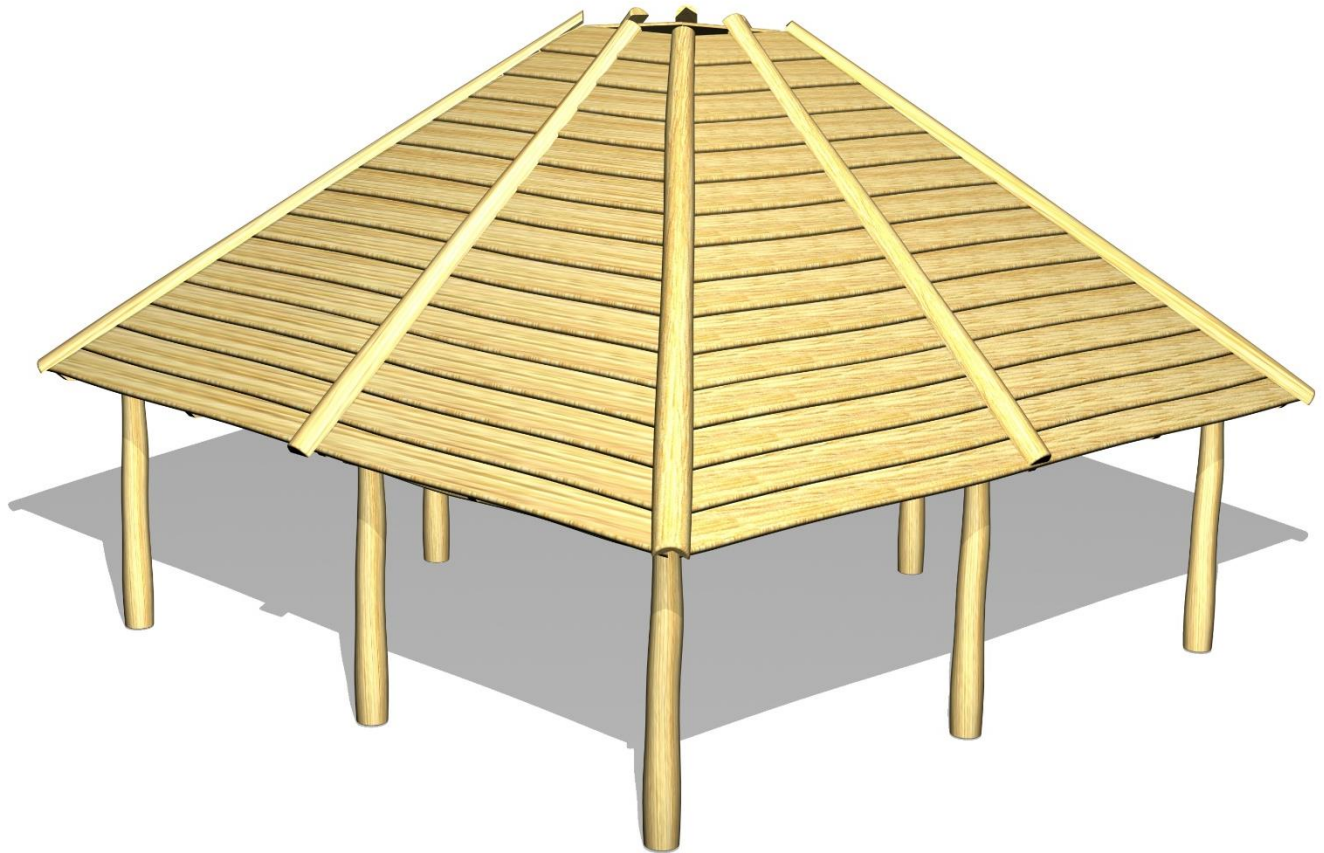

Multihuset i 90 serien kan leveres i 3 varianter, modul 450, 550 og 650cm. Højden på indgang kan leveres med stolper i 2.5m og 3m, der giver en højde underkant rem på 160 henholdsvis 210cm. Huset kan suppleres med sider i 3 højder, 2 størrelser tilbygninger, bænke og borde samt en røghat.

Materialerne er robinia stolper, remme og spær i Douglas og tag i lærke kalmar.

På de følgende sider viser vi montageprincipper gælden for alle typer samt en løsdelsoversigt med montage vejledning.

God fornøjelse



The multi-housing in the 90 series can be delivered in 3 variants, modules 450, 550 and 650cm. The height of the entrance can be delivered with posts in 2.5m and 3m, which give a height lower edge strap of 160 and 210cm respectively.




The house can be supplemented with sides in 3 heights, 2 sizes of extensions, benches and tables as well as a smoke hat.

The materials are robinia posts, straps and rafters in Douglas and roof in larch squid.

On the following pages, we show the assembly principles applicable to all types as well as a loose parts overview with assembly instructions. Enjoy

9010  
4.5X4.5m

Datablad / data sheet

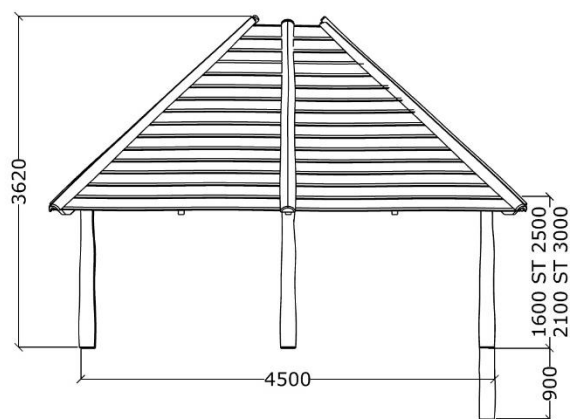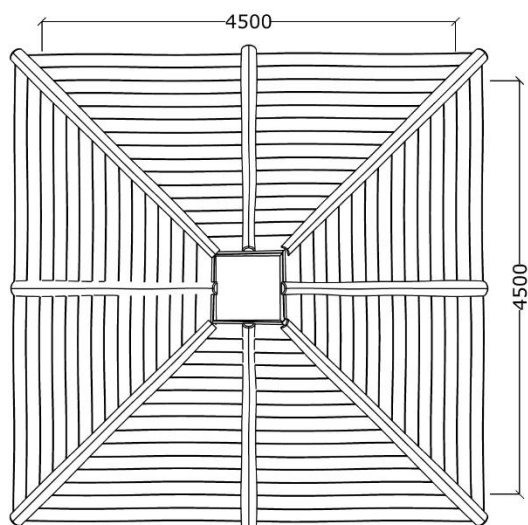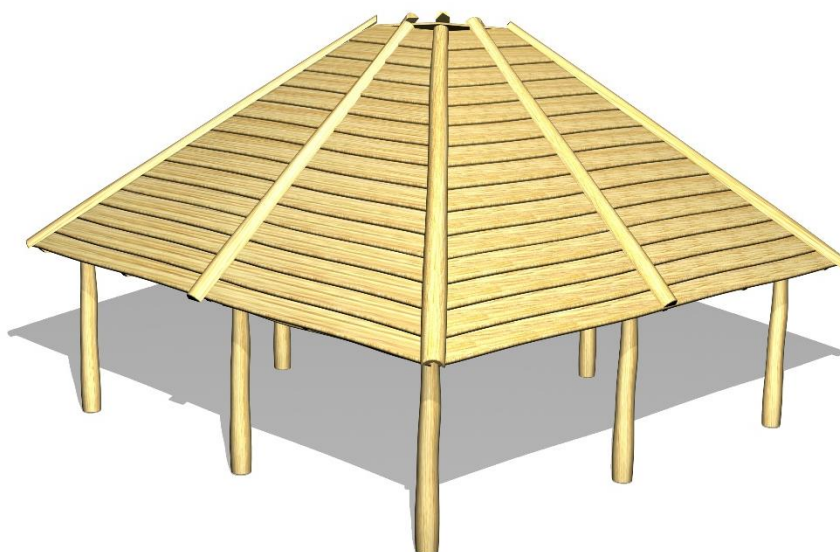

1600  
overkant stolpe H=2500 /  
top post H=2500

2100  
overkant stolpe H=3000  
Top post H=3000



|                       |                         |                      |                      |
|-----------------------|-------------------------|----------------------|----------------------|
| Serie: Multihuse      | Vare nr.: 9010          | Dato: 02.02.2021     | Aldersgruppe: 0+     |
| Antal montører: 2     | Monteringstid: 16 timer | Samlet vægt: 1500 kg |                      |
| Kg beton pr hul: 25kg | Forboret: Nej           | Leveres samlet: Nej  | Handicap venligt: Ja |



|                                |                       |                         |                        |
|--------------------------------|-----------------------|-------------------------|------------------------|
| Serie: Multihouse              | Item no.: 9010        | Date: 02.02.2021        | Age group: 0+          |
| Numbers of installers: 2       | Mouting time: 16 hour | Total weight: 1500 kg   |                        |
| Kg of concrete per hole: 25 kg | Predrilled: No        | Delivered assembled: No | Disability access: yes |