

PRODUCT CODE:
30991F

**DYNAMIC TOWER 1.0 KIT - POWDER-COATED
GALVANIZED STEEL**

URBAN



DEVICE DATA

The device is difficult to access

Compliance with the PN-EN standard: 1176-1:2024-03

Number of users : 14

Age group : +5

Width : 2.06 m

Length : 5.57 m

Height : 2.25 m



Minimum space required : 9.60 mx 6.10 m

Free fall height : 2.20 m

Fall area : 45.70 m²

Foundation depth : -0.60 m

PROJECTION AND VIEW OF THE DEVICE

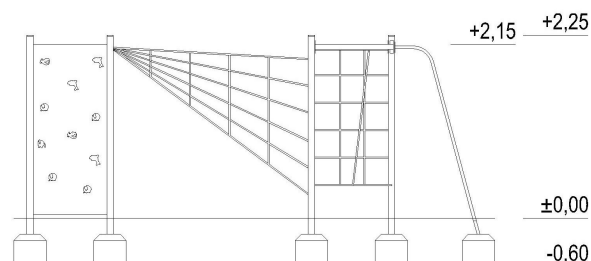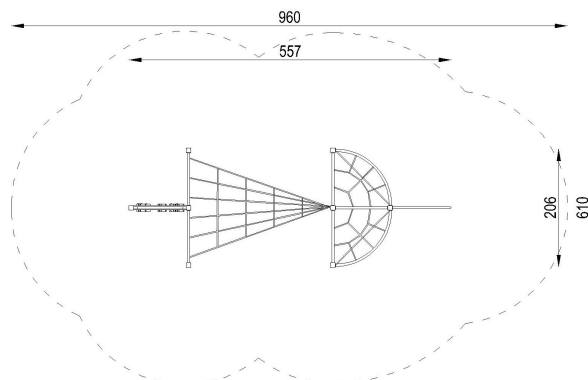

COMPONENTS

Vertical ladder: 2 pcs.

Climbing rope: 2 pcs.

Vertical rope: 3 pcs.

Straight-line entrance guide: 1 pc.

Fire pipe: 1 pc.

Climbing wall: 1 pc.

TECHNOLOGY

Structural legs: square steel profiles, cross-section 80x80mm, hot-dip galvanized and powder coated

Filling and decorative elements: HDPE boards, 15mm thick, dyed throughout, solid polycarbonate boards

Steel elements: galvanized steel, powder coated

Ropes: multi-strand polypropylene, with a steel core, Ø 16mm connected with polyamide system connectors, screwed together with stainless steel screws

Caps: system caps made of plastic, dimensions adapted to the mounting screws used

Foundations: wet poured foundation footings , made of concrete class at least C12/15

Due to continuous improvement of technical solutions, the presented drawings, including colors and dimensions, may differ slightly from the currently manufactured devices.

NOLMO Sp. z o. o. reserves all rights to copyright protection under the Act of 04.02.1994 on Copyright and Related Rights (Journal of Laws No. 28 item 83), in particular Articles 78 and 79 of that Act.