


PRODUCT CODE:
30994M-BL-WH

**DYNAMIC TOWER 4.0 KIT - BLUE AND WHITE, POWDER
COATED GALVANIZED STEEL**

URBAN

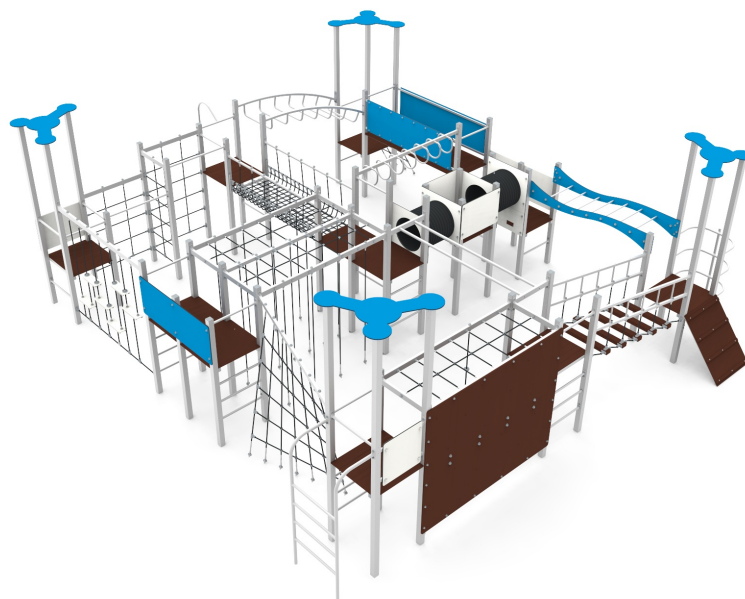

DEVICE DATA

PROJECTION AND VIEW OF THE DEVICE

The device is difficult to access

Compliance with the PN-EN standard: 1176-1:2024-03

Number of users : 54

Age group : +5

Width : 9.25 m

Length : 8.25 m



Height : 3.70 m

Minimum space required : 12.40 mx 11.29 m

Free fall height : 2.20 m

Fall area : 127.70 m²

Foundation depth : -0.60 m

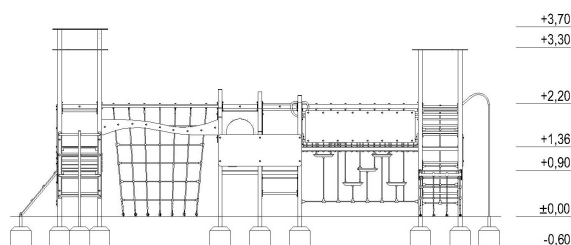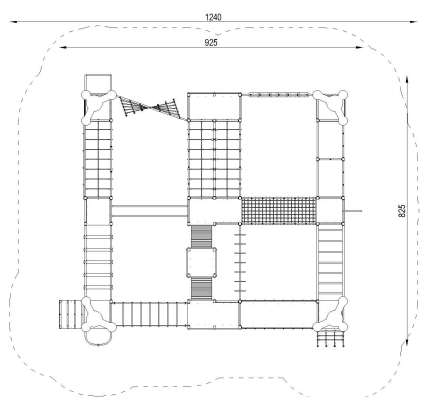

COMPONENTS

Double tower without roof, platform height 90 cm: 1 pc.

Double tower without roof, platform height 136 cm: 2 pcs.

Single tower with roof , platform height 90 cm: 3 pcs.

Single tower with roof, platform height 136 cm: 3 pcs.

Diagonal entrance rope fence, height 90 cm: 1 pc.

Vertical rope net, height 180 cm: 1 pc.

Narrow vertical rope net, height 220 cm: 1 pc.

Wide vertical rope net, height 220 cm: 1 pc.

Vertical rope playset with steps, height 220 cm: 1 pc.

Wide horizontal rope net: 1 pc.

Narrow horizontal rope net: 1 pc.

Vertical agility ropes: 1 pc.

Climbing ropes height 220 cm: 2 pcs.

Vertical ladder: 8 pcs.

Horizontal Ladder length 228 cm: 1 pc.

Arch ladder: 1 pc.

Straight rope bridge, length 228 cm: 1 pc.

Inclined rope bridge, length 228 cm: 1 pc.

Straight bridge with platform, length 228 cm: 1 pc.

Fireman's pole, height 136 cm: 1 pc.

Double fire pipe with ladder, height 136 cm: 1 pc.

Single fire pipe with ladder, height 90 cm: 1 pc.

Tunnel passage: 1 pc

Single horizontal gymnastic bar, length 228 cm: 1 pc.

Double horizontal gymnastic bars, length 228 cm: 1 pc.

Gymnastic pull-up bar: 2 pcs.

Rectangular rope interlacing, height 220 cm: 1 pc.

Wide climbing wall, height 220 cm : 1 pc.

Diagonal entrance gangway, height 136 cm: 1 pc.

TECHNOLOGY

Structural legs: square steel profiles, cross-section 80x80mm, hot-dip galvanized and powder coated

Filling and decorative elements: HDPE boards, 15mm thick, dyed throughout, solid polycarbonate boards

Platforms: waterproof plywood , 15mm thick, with an anti-slip layer in a "hexa" pattern, mounted on joists made of cross-section steel profiles 60x40mm, galvanized, unpainted

Steel elements: galvanized steel, powder coated

Ropes: multi-strand polypropylene, with a steel core, Ø 16mm connected with polyamide system connectors, screwed together with stainless steel screws

Climbing wall: handles made of resin-based material attached to polycarbonate panels, mounted on joists made of 40x27mm cross-section steel profiles, galvanized, unpainted

Tunnel: PVC pipe, attached to HDPE plate

Caps: system caps made of plastic, dimensions adapted to the mounting screws used

Foundations: wet poured foundation footings , made of concrete class at least C12/15

Due to continuous improvement of technical solutions, the presented drawings, including colors and dimensions, may differ slightly from the devices currently produced.

NOLMO Sp. z o. o. reserves all rights to copyright protection under the Act of 4 February 1994 on Copyright and Related Rights (Journal of Laws No. 28 item 83), in particular Articles 78 and 79 of that Act.