



Information about the product

Dimensions	260 x 160 cm
Safety zone	600 x 500 cm
Safety zone area	22,4 m ²
Overall height	-
Free fall height	90 cm
Amount of users	2
Product complies with EN 1176-1:2017-12	Yes
Availability of spare parts	Yes
Age range	3-12

According to EN 1176-1:2017-12 norm, the product requires applying a safety surface according to the product's free fall height.

Functions




Jumping




Emotion regulation



Socializing

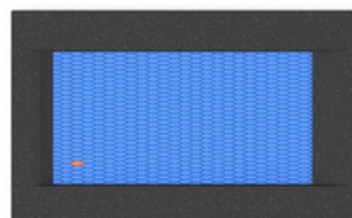

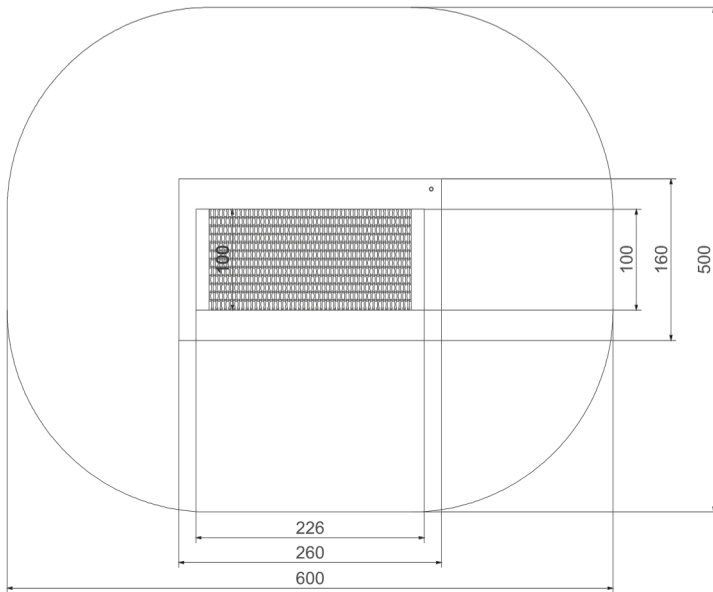

1:75

Warranty

2 years 

The Guaranty covers all flaws of the elements made of rubber, moving elements (bearings, joints), electronic elements, elements made of EPDM, elements made of plywood and other not mentioned before revealed during usage, which arise from manufacturing reasons.

Due to the height of the free fall of the product, the EN 1176-1:2017-12 norm allows following types of fall- absorbing surfaces:

Material	Description	Minimal layer thickness mm
Bituminous surfacing		
Top layer of the soil		
Turf		
Bark	Chipped bark of coniferous trees (no wood-based materials), the size of the pieces between 20mm to 80mm	300
Wood chips	Mechanically fragmented wood without bark and leaves, size of the pieces between 5 mm to 30	300
Sand or gravel	Particle size between 0,25 mm to 8 mm	300
Synthetic material	Synthetic material with an approval for free fall heights ≥ 90 cm	

All types of surfaces need to be preserved by adding bulk material and removing extraneous matters. Broken glass is considered to be most hazardous.

Product description

Trampoline

Dimensions: 260 x 160 cm
Safety zone: 600 x 500 cm
Total height:
Free fall height: 90 cm.


Materials:

- Robust, welded trampoline frames made from 3 mm sheet steel, hot-dip galvanised.
- Black SBR rubber surfacing, 30 cm wide, resistant to crumbling, cut from 30 mm thick sheets.
- Anti-slip jumping mat, abrasion-resistant. Gaps between slats approximately 3 mm.
- Anti-slip slats made of injection-moulded polyamide.

The equipment comprises at minimum:

- Jumping mat
- Trampoline frame
- SBR edging

Materials



Solid welded construction made of 3 mm metal sheet, hot-dip galvanised.



Black SBR rubber surface, 30 cm wide, crush-resistant, cut from a 30 mm thick sheet.



Anti-slip jumping mat, abrasion-resistant. Spacing between slats = 3mm.



Anti-slip trampoline slats made of injection-moulded polyamide.