
ECO





INFORMATION ABOUT THE PRODUCT

IN OKWINION ADOUT THE TRODUCT	
Dimensions	1001 x 691 cm
Safety zone	1301 x 991 cm
Safety zone area	89 m²
Overall height	321 cm
Free fall height	120 cm
Amount of users	60
Product complies with EN 1176-1:2017	YES
Availability of spare parts	YES
Age range	3-12
According to EN 1176-1:2017 norm, the product requires applying a safety surface according to the product's free fall height.	

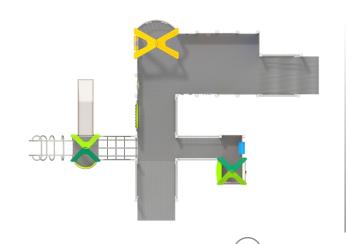

8045

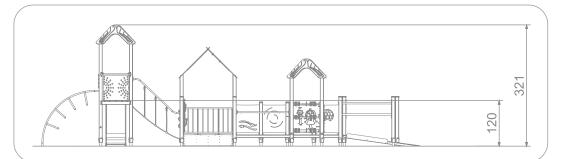

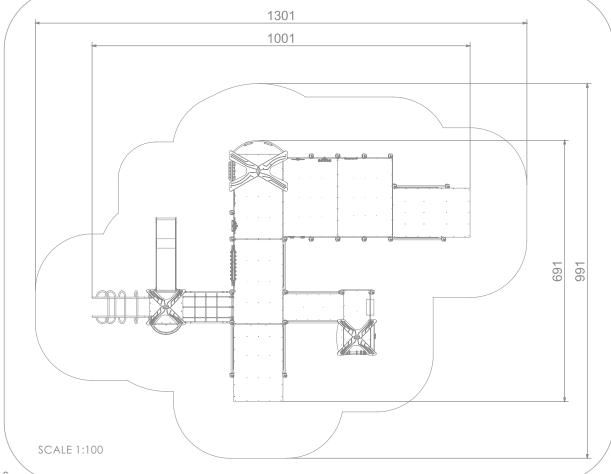

MATERIALS:

SOFT CONIFER WOOD CORELESS, GLUED IN LAYERS WITH POLYURETHANE GLUES, TOTALLY RESISTANT TO WATER WOODEN POSTS ANCHORED TO THE GROUND WITH POWDER GALVANIZED AND POWDER COATED STEEL



ALLOY

ALLOY

SYSTEM OF CONNECTORS AND CLAMPS MADE OF

STRONG ALUMINIUM

PATENTED SYSTEM OF CONNECTORS AND CLAMPS MADE OF STRONG ALUMINIUM

PLATES OF THE WALLS MADE OF COLOURFUL TRIPLE LAYERED 15 MM HDPE POLYETHYLENE, IN THE HIGHEST QUALITY, TOTALLY DAMP-PROOF.

PERFORATED STEEL SHEET GALVANISED AND POWDER COATED WITH



ALLOY.

ROPE ENDINGS PRESSED IN A SLEEVE MADE OF DURABLE ALUMINIUM

POLYAMIDE.

THE TIC TAC TOE GAME IS MADE OF POLYETHYLENE ROTATIONALLY MOLDED WITH SYMBOLS ON THE FORM.



SOLID AND ESTHETIC ROPE CONNECTING ELEMENTS CONNECTORS MADE OF INJECTION MOLDED LIKE SCREWS, NUTS, WASHERS MADE OF STAINLESS STEEL.



ANTI-SLIP ANTHRACITE 10MM HPL PLATFORM

CONDITIONS AND

PLATE WITH A VERY HIGH RESISTANCE TO WEATHER



SLIDES MADE OF STAINLESS STEEL AISI 304. METAL SHEET WITH A THICKNESS OF 2 MM FORMED IN A CNC TECHNIQUE.







