

# AROBASE RANGE



## AROBASE SEATS WITHOUT SLEEVE

Ref :

- 1 16 0510
- 2 16 0520
- 3 16 0400 | 16 0500
- 4 16 0310
- 5 16 0320
- 6 16 0100 | 16 0200 | 16 0300

## AROBASE SEATS WITH SLEEVE

Ref :

- 7 16 0350
- 8 16 0360
- 9 16 0340

## Colours

Seat cushion : zinc yellow RAL 2018  
Structure : Zinc yellow Ral 1018 (sablé)

Colours to be selected within the RAL tints, sablé or other coatings of the AkzoNobel Futura range.

## Presentation

Arobased has resulted from the expertise of designer Alexandre Moronnoz and Sineu Graff. Together, they have devised an original furniture line.

Depending on the setting, Arobased responds to uses for which people remain for short to long periods: people come to rest, eat, for a convivial moment with other users, or to work outdoors. Arobased seats can be turned around as you like to live up your public spaces. Arobased furniture has been designed to meet the technical challenges of installation on slopes. So slopes are no longer an obstacle but an advantage: they lead to slight variations of seat heights so that children and adults can find the exact seat height for a comfortable pause.

This new programmable seating solution signs in a novel, fresh manner public realm spaces both by its modularity and attractiveness.

## Description

The **Arobased seat** is made of a 3mm **thick steel structure** an **oblong shape seat cushion plate in painted die-cast aluminium** (standard version) and a 4 mm **thick leg** (Ø 152 mm).

Model **without sleeve** : The module is made of a machine-welded piece.

Model **with sleeve** : The module is made of 2 machine-welded pieces (leg and sleeve), assembled by bolts.

The screws are in 304L inox.

Model **to be fixed** : fastening of the leg (Ø 152 mm) in a concrete base.

Model **on base plates** : fastening by 4 metal anchoring bolts (Ø 12 mm | 4 holes Ø 14 mm in the plate) on a concrete block.

**Removable model** : fastening by 4 screws on an anchoring piece to be fastened in a concrete base. In case of removal of the seat, a plate hides the anchoring piece (fastening with 4 screws).


**Steel parts are zinc coated**, then they undergo our **powder blast process** (after cleaning and shot blasting, they are coated with a first coat of epoxy powder, and then with a second coat of polyester powder).

4 anchoring points (Ø 15 mm).

Delivered assembled.

## Dimensions

### SEATS WITHOUT SLEEVE

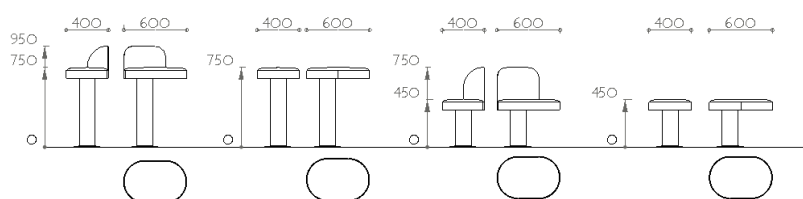

**Table with light screen**

Ref. 16 0510 - 28 kg  
Ref. 16 0520 - 28 kg

**Table** | ht 750mm

Ref. 16 0500 - 26 kg

**Low table** | ht 600mm  
Ref. 16 0400 - 24 kg

**Seat with backrest**

Ref. 16 0310 - 25 kg

Ref. 16 0320 - 25 kg


**Seat** | ht 450mm

Ref. 16 0300 - 21 kg

**High step** | ht 325mm  
Ref. 16 0200 - 20 kg

**Low step** | ht 200mm  
Ref. 16 0100 - 18 kg

### SEATS WITH SLEEVE

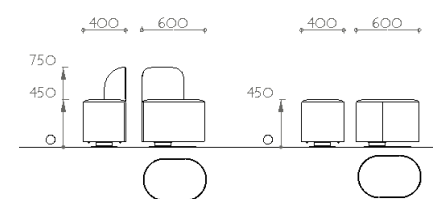

**Seat with backrest**

Ref. 16 0350 - 40 kg

Ref. 16 0360 - 40 kg

**Seat without backrest**

Ref. 16 0340 - 36 kg



The mark of responsible forestry